


# NRSE Series

## SMD Shielded Tiny Power Inductor

### Size 6028




#### CHARACTERISTICS

- 
- 


#### APPLICATION

- 
- 

#### Dimensions: [mm]

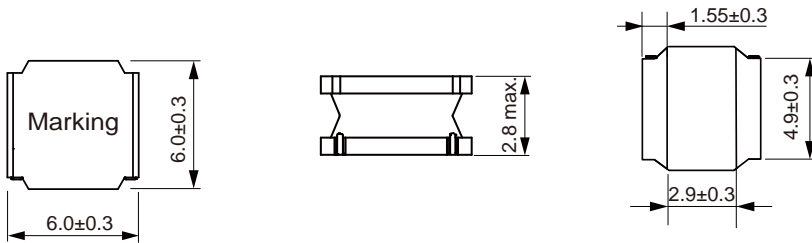

#### Land Pattern: [mm]



#### Electrical Properties:

		±30%	6.70	4.60	12
	1.2	±30%	6.50	4.30	16
	1.5	±30%	6.00	4.30	16
	1.8	±30%	5.30	4.10	19
	2.2	±30%	5.10	3.75	20
	3.3	±30%	3.63	3.40	25
	4.7	±30%	3.00	3.00	33
	5.6	±30%	2.80	2.45	45
	6.8	±20%	2.60	2.40	56
	8.2	±20%	2.40	2.25	68
	10	±20%	2.05	1.90	78
	12	±20%	1.80	1.70	88
	15	±20%	1.75	1.50	125
	18	±20%	1.55	1.45	130
	22	±20%	1.45	1.40	140
	27	±20%	1.40	1.30	180
	33	±20%	1.35	1.10	220


	39	±20%	1.25	1.10	225
	47	±20%	1.15	1.05	280
	68	±20%	0.95	0.85	420
	82	±20%	0.80	0.70	550
	100	±20%	0.65	0.60	670
	120	±20%	0.62	0.58	820

°C   °C

°C

### Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

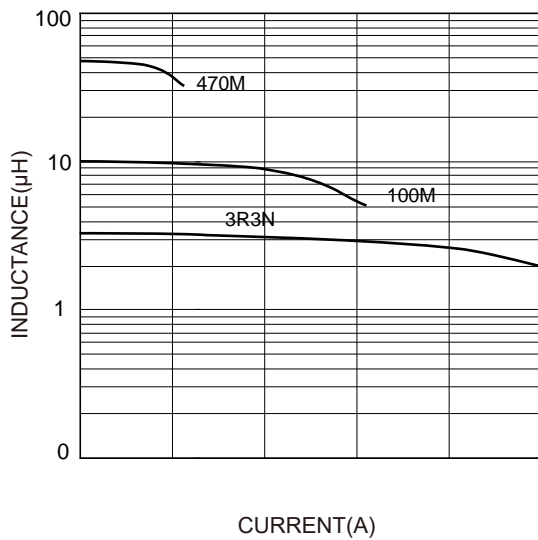

Temperature Rise VS. Current Characteristics:

